


Airflow 3™

COMBI HP 600ml


A single component pneumatic bead applicator for cartridges and sachets

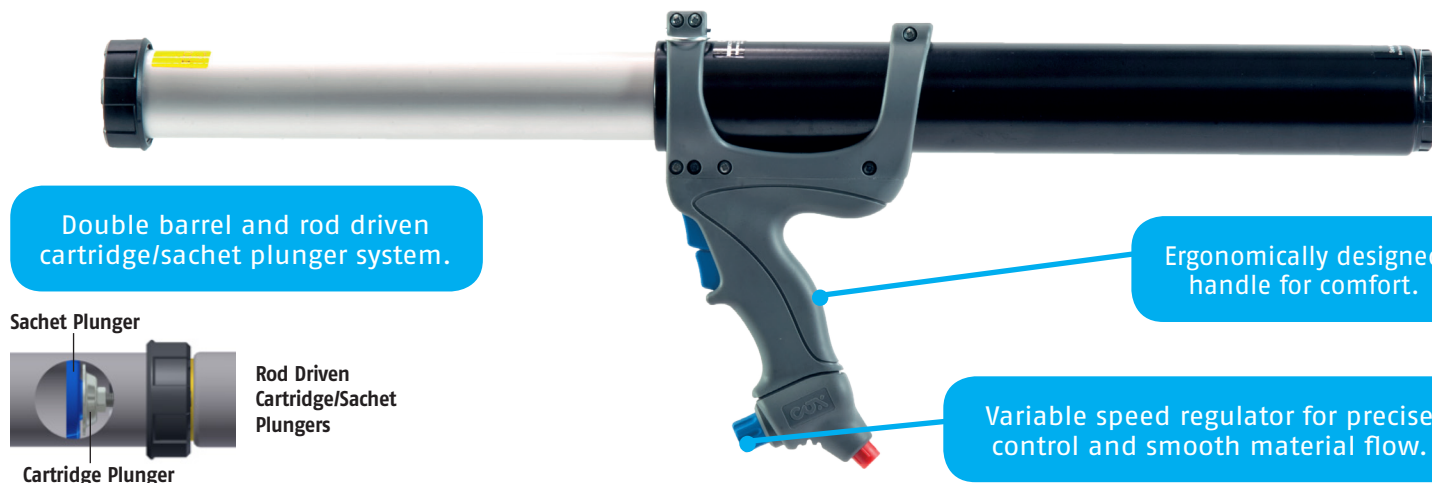

PRODUCT FEATURES:

- Very powerful tool for high viscous materials 8.5bar (125psi).
- Built-in silencer (less than 70dB) for user-friendly environment.
- 63.5mm (2.5") back barrel for more pneumatic power output.
- Air return feature: by pressing the air return button the rod and plunger configuration pulls back, ready to be loaded with a new cartridges/sachet. This feature can also be used for loading (sucking) bulk material into the barrel.

COMPRESSOR GUIDE

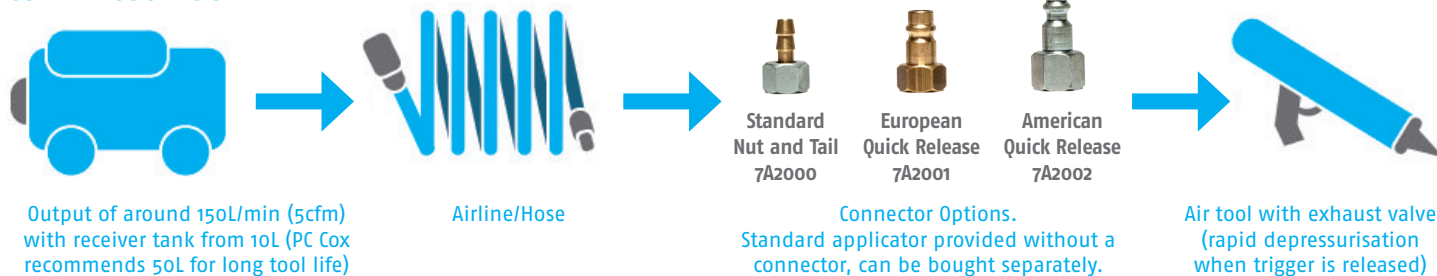

The **Cox Airflow 3** is part of a range of mid-powered pneumatic applicators. Designed for use with medium to high viscosity sealants and adhesives, the Airflow 3 is ideal for professional and semi-professional users.

For more information call +44(0)1635 264500
Or visit www.pccox.co.uk

Airflow 3™

COMBI HP 600ml

A single component pneumatic bead applicator for cartridges and sachets



APPLICATIONS:

- For medium to high viscosity
- Cartridge: 1-component
- Cartridge volumes: 310ml, 400ml
- Sachet volumes: 310ml, 400ml, 600ml

SPECIFICATIONS:


- Max Pneumatic Pressure: 8.5bar (125psi) (others available)
- Barrel Length: 346.5mm
- Maximum Thrust: 2.5kN
- Tool Weight: 1.83kg
- Tool Material: Glass filled nylon handle, anodised aluminium barrel
- Certificates: ISO, REACH, CE, EN
- Packaging Options: 1 per box

WEB LINKS:

- Academy video
www.pccox.co.uk/en/cox-academy
- Spare parts diagram
www.pccox.co.uk/en/exploded-diagrams


OTHER MODELS AVAILABLE:

- Airflow 3 Sachet
- Airflow3 Cartridge
- Airflow 3 Combi
- Airflow 3 Compact Combi

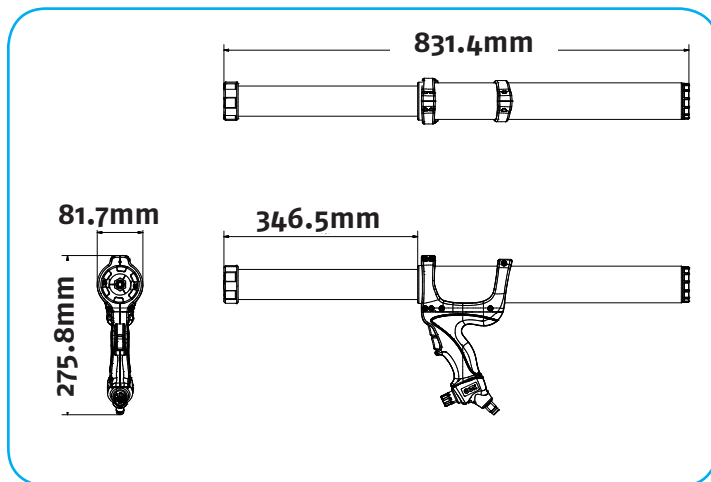


CARTRIDGES/SACHETS:

310ml:

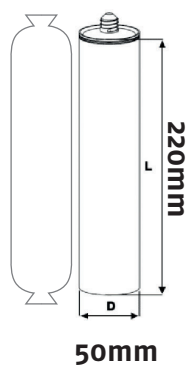

400ml:

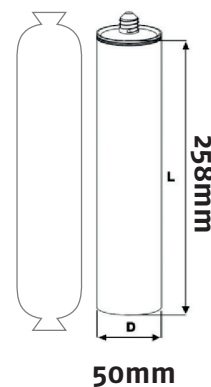

600ml:



PRODUCT RANGE BY POWER:



PC Cox Ltd., Turnpike Road, Newbury, Berkshire, RG14 2LR
T Sales +44 (0) 1635 264500 F +44 (0) 1635 264555
E sales@pccox.co.uk
www.pccox.co.uk

©PC Cox Ltd. 2014. Cox is a trademark of PC Cox Ltd. Every effort has been made to ensure that the information contained in this leaflet was correct at the time of going to press. However, the company retains the right to change any specification without notice, in line with the company's policy of continual product development.

1P3298


The original

