

1. PRODUCT NAME: Titebond® WeatherMaster™ Metal Roof Sealant

2. MANUFACTURER: Franklin International, 2020 Bruck Street Columbus, Ohio 43207

Customer Service: 1-800-669-4583

Technical Service: 1-800-347-4583

Website: www.titebond.com

3. DESCRIPTION:

Titebond WeatherMaster Metal Roof Sealant is a one-component, moisture cure, non-priming, premium grade, advanced MS polymer elastomeric sealant. (Note: Titebond WeatherMaster Metal Roof Translucent #61111 is an advanced neutral cure silicone) It offers excellent adhesion to Kynar™ coated metals, wood, masonry, PVC, metal siding and most common building materials. This formulation contains no solvents or isocyanates and its very low VOC content meets the most stringent state and federal VOC regulatory requirements.

Color:

It is available in over 60 colors. For a complete listing of colors (with matches to many national metal roofing and siding manufacturers) please visit www.titebond.com/color_matcher.aspx.

Coverage:

10.1 fl. Oz. (300ml) yields approximately 31 linear ft. (9.45 meters) of ¼" (6 mm) round bead

Features and Benefits

Features	Benefits
Joint movement capability +/- 50%*	Withstands substrate movement in properly designed joints
Ultra low VOC	VOC compliant in all 50 states; complies with LEED, NAHB, CARB and Green Globes standards.
60 + colors	Matches most common substrates
Weather and aging resistant	Maintains durable weather tight seals over long time frames
Extrudes and cures down to 0°F (-18°C)	Can be applied in frigid cold winter conditions (remove ice and frost before application)
UV-resistant	Will not crack
Excellent unprimed adhesion	Bonds to most common metal building materials
Paintable* surface skins quickly	Paintable* after 1 hour (exterior water-based latex paint recommended)
Fills gaps up to 1" (25 mm)	Can seal joints with +/- 1/2" (+/- 13 mm) movement
98% + solids	Low shrinkage from cure process
Primer not needed for most construction materials	Reduces installation costs

*Titebond WeatherMaster Metal Roof Translucent #61111 has +/- 25% joint movement capability and is not paintable.

Where to Use

Applications	Locations	Substrates
Metal roof	Exterior	Metal PVC
Trim	Above grade	Aluminum Fiberglass
Architectural metal siding		Galvanized steel Steel
General roofing applications		Masonry Wood
Gutters		Vinyl Many plastics
Downspouts		Glass

Limitations

- Upon application, air, sealant and surface temperature should be at or above 0°F (-18°C) and the substrate free of frost and ice.
- WeatherMaster Metal Roof is intended for exterior use and if used indoors must be painted*.
- May be painted* with an exterior water-based latex paint approximately one hour after application. For other types of paint, a compatibility test is required.
- Rigid paint coatings are not recommended as their films can crack or lose adhesion due to movement of an elastomeric sealant in a dynamic joint.
- Always apply sealant in bead form. Do not smear, feather or wipe sealant to a thin consistency or film outside of joint area unless 1) sealant will be painted* or 2) the area has been masked with tape. Once sealant is dry to touch and does not transfer, remove masking tape.
- Sealant is not designed for continuous submersion or use below the waterline.
- This is a moisture cure sealant and if used in lower humidity and temperature conditions, full curing and skin formation times will be extended.
- Do not use sealant to fill nail or screw holes.

*Titebond WeatherMaster Metal Roof Translucent #61111 is not paintable.

4. TECHNICAL DATA AND PROPERTIES

Applicable Standards:

This chemically curing sealant meets or exceeds the requirements of:

- ASTM C920 Type S Grade NS Class 50** Use NT, T, G, A and O
- Federal Specification TT-S-00230C Type II Class A
- CAN/CGSB-19.13-M87 Classification MCG-2-40-A-N†
- AAMA 808.3-92 **translucent**
- USDA approved for meat and poultry areas **white and colors**

**Titebond WeatherMaster Metal Roof Translucent #61111 is Class 25

†Titebond WeatherMaster Metal Roof Translucent #61111 is Classification MCG-2-25-A-N

Typical Uncured (as supplied) Properties

Typical Uncured (as supplied) Properties (Material and curing conditions @75°F (24°C) and 50% R.H.)		
Property	Method	Value
Type		Advanced MS Polymer (Note: Titebond WeatherMaster Metal Roof Translucent #61111 is an advanced natural cure silicone.)
Storage Life		18 months
Storage Conditions		Store original/unopened containers at or below 75°F (24°C) and 50% RH
Application Temperature Range		Above 0°F (-18°C) (remove ice and/or frost from substrate)
Full Cure		24 hours (1/4" bead or less)
Freeze/thaw stability		Stable, will not freeze
Flashpoint		Solvent free/Not applicable
Reactive VOC		9 g/L (<1.5% wt.) white and colors 28 g/L (<3% wt.) translucent
Solids		98%
Viscosity		500,000 cps
Rheological Properties	ASTM C639	Non-sag
Extrusion Rate	ASTM C1183	110 mL/min; white & colors 503 mL/min translucent
Tack-Free Time	ASTM C679	Approximately 20-30 minute skin time @ 75°F (24°C) and 50% RH white, colors Approximately 20 minutes skin time @ 75°F (24°C) and 50% RH translucent

Typical Cured Properties		
Property	Method	Value
Joint Movement Capability	ASTM C719	+/- 50% white and colors +/- 25% translucent
Tensile Strength	ASTM D412	225 psi white and colors 255 psi translucent
Percent Elongation at Break	ASTM D412	275% white and colors 550% translucent
Hardness – Shore A	ASTM C661	40 – 50 white and colors 15 – 25 translucent
Effect of Heat Aging	ASTM C1246	Pass/No cracking
Stain and Color Change	ASTM C510	Pass/No Stain
Adhesion-in-peel	ASTM C794	
Aluminum		Pass
Glass		Pass
Effects of Accelerated Weathering	ASTM C793	Pass
Service Temperature Range		-75°F to 300°F (-59°C to 149°C) white and colors -40°F to 350°F (-40°C to 177°C) translucent

5. INSTALLATION:

JOINT DESIGN

Joint Width:

Joints must be designed to accommodate the +/- 50% expansion/contraction capability of Titebond WeatherMaster Metal Roof sealant*.

For example, if the substrates are anticipated to move +/- 1/2" (or 12mm), then the joint width would be calculated as follows:

$$\begin{array}{ll}
 50\% \times JW \text{ (joint width)} = 1/2" & 50\% \times JW \text{ (joint width)} = 12 \text{ mm} \\
 JW = 1/2" / .50 = 1" & \text{or } JW = 12\text{mm} / .50 = 24\text{mm}
 \end{array}$$

Recommended minimum joint width is 1/4" (6mm) and recommended maximum joint width is 1" (25mm).



Note: For more detailed information on joint design, we recommend reviewing the most recent additions of 1) ASTM C1193 Standard Guide for Use of Joint Sealants and 2) ASTM C1472 Standard Guide for Calculating Movement and Other Effects When Establishing Sealant Joint Width

Joint Depth:

Joints should be designed with a depth to width ratio of 1:2 (joint depth = 1/2 width), but in no case should the joint depth be less than 1/4" (or 6mm) or greater than 1/2" (or 12mm).

*Titebond WeatherMaster Metal Roof Translucent #61111 is Class 25 and accommodates +/- 25% joint expansion/contraction.

IDEAL SEALANT JOINTS

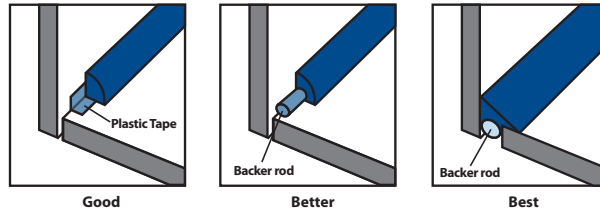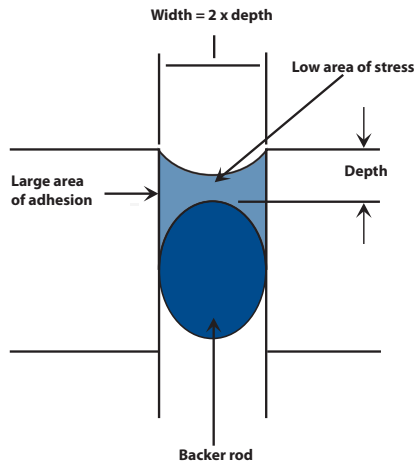

Backer Rod or Bond Breaker Tape:

The depth of the sealant must be controlled by using a suitable sealant backing material. The backing material must also function as a bond breaker to eliminate 3 sided adhesion and allow the sealant to expand and contract properly as designed.

Surface Preparation:

Surfaces must be cleaned down to the original substrate and free of any material or contaminant that may prevent or deter adhesion. Such contaminants include, but are not limited to: dirt, frost, loose particles, existing sealants, grease, oils, rust, etc.

Application:

Air, sealant and substrate surface temperatures must be at or above 0°F (-18°C) at the time of application. For best results, sealant should be applied when joint is at midpoint of its designed dynamic expansion and contraction. Always apply sealant in bead form. After joints have been completely filled, they should be neatly tooled to eliminate air pockets or voids, and to ensure good substrate wetting for optimum adhesion. Dry tooling is recommended and use of solvents or soapy water as tooling agents is discouraged. Do not smear, feather or wipe sealant to a thin consistency or film outside of joint area unless the area has been masked with tape or if it will be painted. Once sealant is dry to touch and does not transfer, remove masking tape. Do not use sealant to fill nail or screw holes.

Linear Feet of Sealant per Gallon*

Joint Size (rectangle)	Depth (inches)		
	1/4"	3/8"	1/2"
Width (inches)	1/4"	308.0	
	3/8"	207.0	
	1/2"		
	5/8"		
	3/4"		
	7/8"		
	1"		

* 12 cartridges equal approximately 1 gallon

Linear Meters of Sealant per Liter*

Joint Size (rectangle)	Depth (mm)		
	6	10	13
Width (mm)	6	27.8	
	10	16.7	
	13		
	16		
	19		
	22		
	25		

* 12 cartridges equal approximately 3.6 Liters

Cleanup:

Uncured sealant may be cleaned with isopropyl alcohol. * After curing, excess sealant must be cut or scraped away. Follow solvent vendor's precautions when using solvents.

* Titebond WeatherMaster Metal Roof Translucent #61111 can be cleaned with mineral spirits or similar solvent before cured.

Precautions:

CAUTION: EYE AND SKIN IRRITANT. Do not swallow. Do not allow eye contact or prolonged skin contact. **First Aid:** If swallowed, do not induce vomiting; contact physician. If eye contact occurs, flush with water for 15 minutes. Wash skin contact areas with soap and water. If irritation from eye or skin contact areas persists, contact physician. Product releases methanol** during cure. For additional information, refer to Material Safety Data Sheet. **KEEP OUT OF THE REACH OF CHILDREN.**

**Titebond WeatherMaster Metal Roof Translucent #61111 releases methyl ethyl ketoxime (MEKO) during cure.

6. AVAILABILITY AND COST

Titebond products are available from distributors and dealers serving North America and other continents across the globe. For dealer information contact our Customer Service department at **800-669-4583** or at concustserv@franklininternational.com.

7. WARRANTY

Limited Warranty: If not satisfied with product performance when used as directed, return container and proof of purchase to Franklin International, Inc. for replacement of product. Buyer's sole remedy shall be limited only to the replacement of product exclusive of cost of labor. No other warranties are expressed or implied.

8. MAINTENANCE

Inspect sealant joint area at a minimum of every five years. If the sealant or sealant bond is damaged, completely remove or cut out the sealant in the damaged area and reapply new sealant.

9. TECHNICAL SERVICES

The Titebond Technical Service team is ready to provide assistance in product selection, application methods or other product related questions you may have. They are available Monday thru Friday 8:00 AM to 6:00 PM EST at **800-347-4583** or can be reached at contechserv@franklininternational.com.

10. FILING SYSTEMS

• www.Arcat.com • General Building • 07 92 00 Joint Sealants